



H2BF 250A-800A

Class of operation: aR

保护特性: aR



Standard/ 标准: IEC 60269-4, GB/T 13539.4, UL248-13

INTERRUPTING CAPACITY/ 分断能力:

100,000 amperes at 1250V AC
50,000 amperes at 1000V DC

TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	额定电流 Rated Current	额定电压 Rated Voltage	SAFETY APPROVALS 安全认证		
			TUV	CCC	CE
H2BF250	250A		●	●	●
H2BF280	280A		●	●	●
H2BF315	315A		●	●	●
H2BF350	350A		●	●	●
H2BF400	400A	1250V AC 1000V DC	●	●	●
H2BF450	450A		●	●	●
H2BF500	500A		●	●	●
H2BF550	550A		●	●	●
H2BF630	630A		●	●	●
H2BF700	700A		●	●	●
H2BF800	800A		●	●	●


● DENOTES FOR APPROVAL
○ DENOTES FOR PENDING

● 表示已取得安全认证
○ 表示正在申请安全认证

Dimensions/ 尺寸:

Unit 单位: mm

Type:H2BF Part No.: H2BF(amp rating)

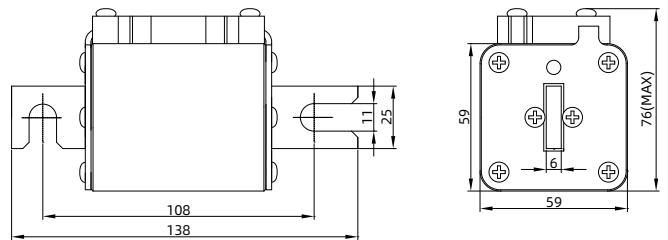

可选配件 Optional Accessory

目录编号 PART NO.

微动开关 Microswitches

H2BF(amp rating)

HMC-01