



H2FF 160A-550A

Class of operation: aR

保护特性: aR



Standard/ 标准: IEC 60269-4, GB/T 13539.4, UL248-13

INTERRUPTING CAPACITY / 分断能力:

100,000 amperes at 1250V AC
50,000 amperes at 1000V DC

TECHNICAL PARAMETERS/ 技术参数:


PART NO. 目录编号	额定电流 Rated Current	额定电压 Rated Voltage	SAFETY APPROVALS 安全认证		
			TUV	CCC	CE
H2FF250	250A		●	●	●
H2FF280	280A		●	●	●
H2FF315	315A		●	●	●
H2FF350	350A		●	●	●
H2FF400	400A	1250V AC 1000V DC	●	●	●
H2FF450	450A		●	●	●
H2FF500	500A		●	●	●
H2FF550	550A		●	●	●
H2FF630	630A		●	●	●
H2FF700	700A		●	●	●
H2FF800	800A		●	●	●

● DENOTES FOR APPROVAL ● 表示已取得安全认证
○ DENOTES FOR PENDING ○ 表示正在申请安全认证

Dimensions/ 尺寸:

Unit 单位: mm

Type: H2FF Part No.: H2FF(amp rating)

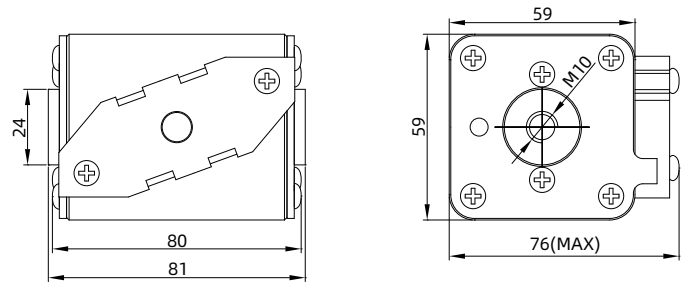

目录编号 PART NO.	可选配件 Optional Accessory
H2FF(amp rating)	微动开关 Microswitches HMC-01